


- 7-years wear warranty
  - Affordable wall-to-wall carpet range
  - Available in six subtle and stylish colours
  - Made from 100% polypropylene Stainsafe



## **Goal**

Goal is a practical and affordable wall-to-wall carpet range from Belgian manufacturer Balta Group, available in six subtle and stylish tones. The innovative polypropylene construction does not absorb any water, so it is bleach cleanable and ultra-resistant to stains. Combined with a loop pile that does not show footprints or vacuum lines, it is perfect for those who want a carpeted floor that requires very little care. The carpet also prevents static build-up, is suitable for underfloor heating and comes complete with 7-year stain and 10-year wear warranties.

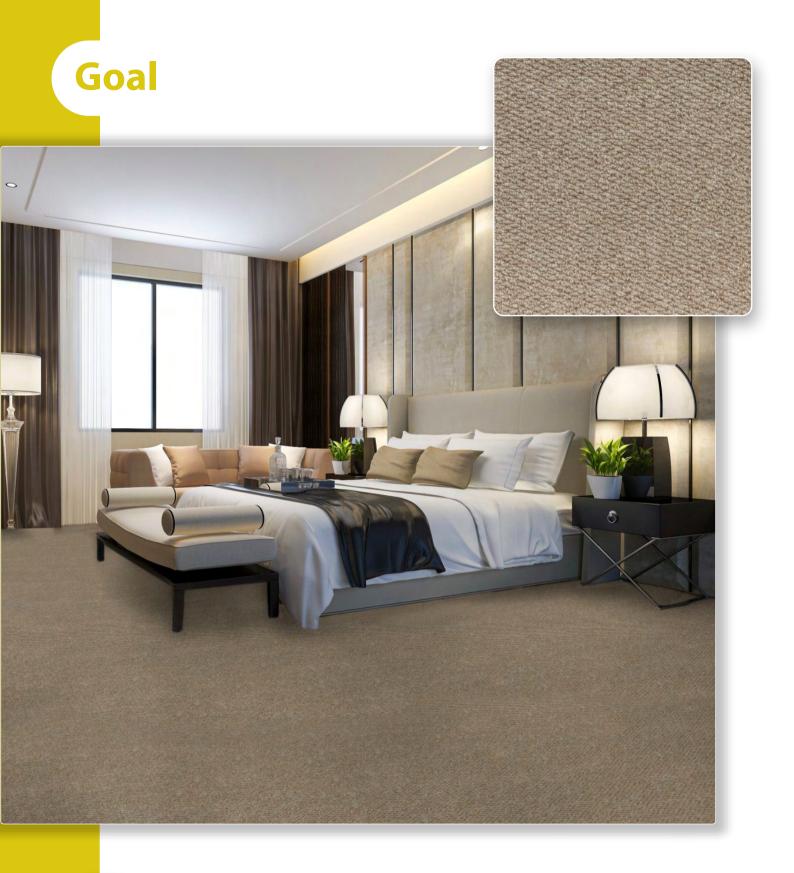



Goal - 680 CRP-BLT-GOAL-01






Goal - 940 CRP-BLT-GOAL-02






Goal - 645 CRP-BLT-GOAL-03

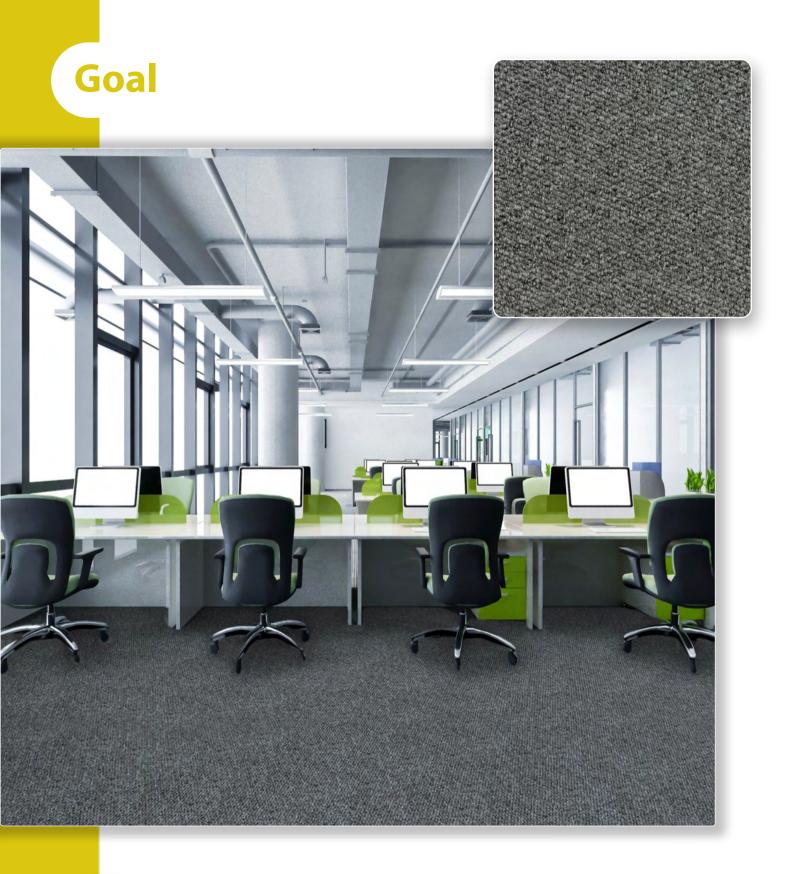



Goal - 950 CRP-BLT-GOAL-04

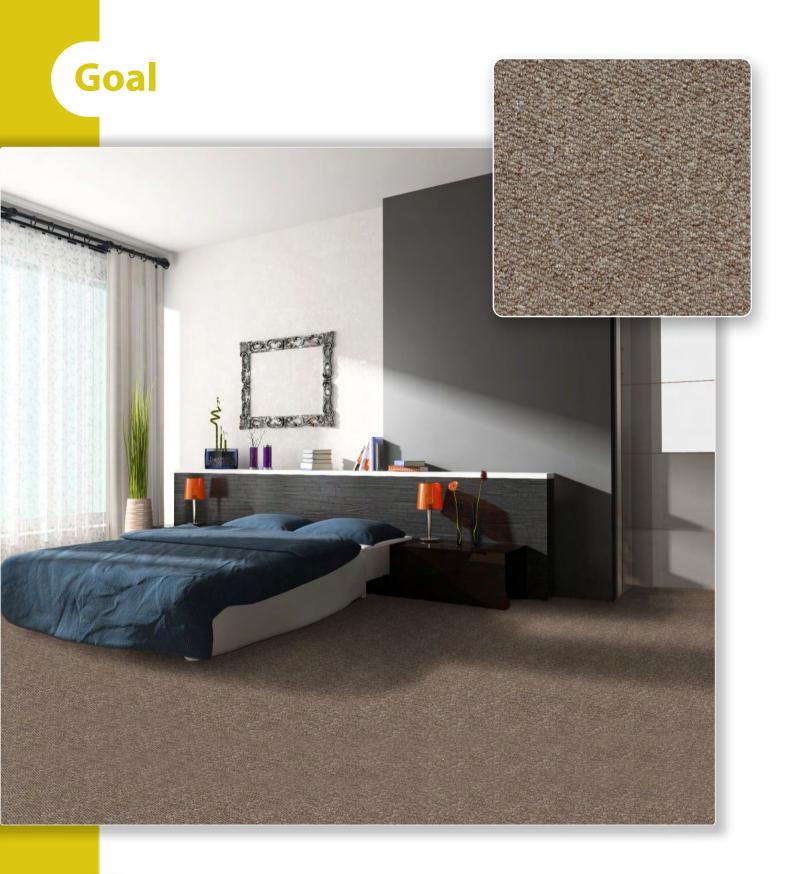



Goal - 850 CRP-BLT-GOAL-05





Goal - 980 CRP-BLT-GOAL-06

## **Big Hit Collection :** Goal

Fabricagemethode Getuft 5/32" lussenpool

Poolsamenstelling 100% PP Stainsafe®

Tuftdoek Geweven PP

Rug Texflor® viltrug

Poolgewicht ca. 500 gr/m<sup>2</sup>

Totaal gewicht ca. 1.290 gr/m<sup>2</sup>

Poolhoogte ca. 6 mm

Totale hoogte ca. 9.5 mm

Aantal noppen ca. 107.600/m<sup>2</sup>

Breedte 400 cm

Aantal kleuren 6

Lichtechtheid

Waterechtheid

Warmtedoorlaatweerstand 0,11 m<sup>2</sup> K/W

EN14041

13 Balta Industries - Wakkensteenweg 2 BE - 8710 Sint-Baafs-Vijve DOP: 1010#BA0AEL Textile Floor Covering EN 1307 PCP HCRID

www.baltamediabank.com

Geluidsisolatie 22 dB

Brandklasse E, (EN13501-1)

Bijzonderheden Bleekmiddelecht Pool naar buiten Méthode de fabrication Tuftée 5/32" bouclé

Composition du velours 100% PP Stainsafe®

Support Tissé PP

Dossier Feutre Texflor®

Poids du velours ca. 500 gr/m<sup>2</sup>

Poids total ca. 1.290 gr/m<sup>2</sup>

Hauteur du poil ca. 6 mm

Hauteur totale ca. 9.5 mm

Nombre de points ca. 107.600/m<sup>2</sup>

Largeur 400 cm

Nombre de coloris 6

Résistance à la lumière 5 - 6

Résistance à l'eau 4 - 5

Résistance thermique 0,11 m<sup>2</sup> K/W

Isolation aux bruits d'impact 22 dB

Classement feu E, (EN13501-1)

Caractéristiques Résiste à l'eau de Javel Velours à l'extérieur

Herstellungsverfahren Getuftet 5/32" Schlinge

680

645

850

940

950

980

Polmaterial 100% PP Stainsafe®

Trägermaterial PP Gewebte

Rückenausrüstung Texflor<sup>®</sup> Vliesrücken

Polgewicht ca. 500 gr/m<sup>2</sup>

Gesamtgewicht ca. 1.290 gr/m<sup>2</sup>

Polhöhe ca. 6 mm

Gesamthöhe ca. 9.5 mm

Noppenzahl ca. 107.600/m<sup>2</sup>

Breite 400 cm

Farbenzahl

Lichtechtheit 5 - 6

Wasserechtheit 4 - 5

Wärmedurchlasswiderstand 0,11 m<sup>2</sup> K/W

Trittschalldämmung 22 dB

Brandverhaltensklasse E. (EN13501-1)

Besonderheiten Bleichmittelecht Flor aussen









Wakkensteenweg 2, 8710 Sint-Baafs-Vijve, Belgium, T +32 (0)56 62 22 11, info@baltagroup.com, www.baltagroup.com

Manufacturing process Tufting 5/32" Looppile

Pile content 100% PP Stainsafe®

Primary backing Woven PP

Secondary backing Texflor® feltbacking

Pile weight ca. 500 gr/m<sup>2</sup>

Total weight ca. 1.290 gr/m<sup>2</sup>

Pile height ca. 6 mm

Total height ca. 9,5 mm

Tuft density ca. 107.600/m<sup>2</sup>

Width 400 cm

Number of colours 6

Light fastness 5 - 6

Water resistance 4 - 5


Thermal resistance TOG: 1.1

Sound insulation 22 dB

Fire class E, (EN13501-1)

Characteristics Bleach resistant Pile outside



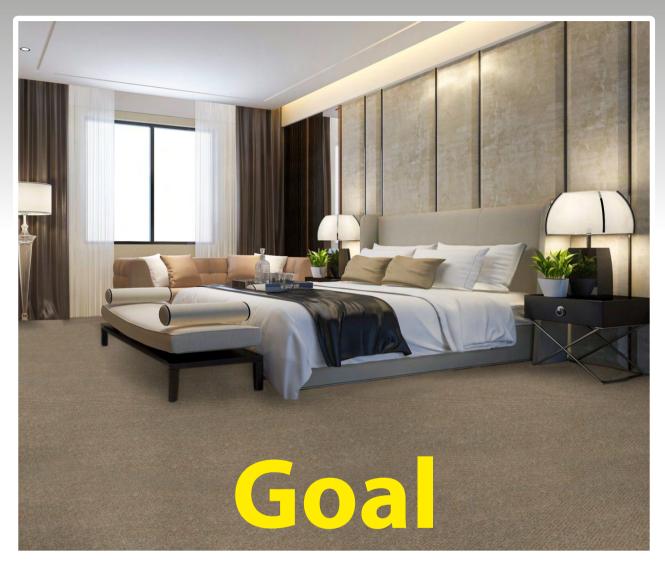

Exclusive Distributor:



Umm Suqeim Street, Al Barsha 2 Dubai, UAE

t: +97148895661

e: sales@floorworld.com

w: www.floorworld.com