



For **Every** Project, where **Light Really Matters**

LED RECESSED CEILING LUMINAIRE SERIES

PRODUCT INFORMATION

- Suitable for a series of lighting applications in office, retail and general area lighting.
- Available in a wide variety of lumen packs, cut out size and color temperature.
- ILLUS LED RECESSED CEILING Luminaire gives the customer the flexibility
To choose between 12 models based on their specific need with lumen package from 420 lm to 1900 lm.

BENEFITS

- Compact design for better integration with the building.
- Comfortable light with high efficiency
- Reliable performance for indoor applications.

FEATURES

- High CRI>90.
- Efficacy up to 80 lm/w.
- Long life span 30,000 hrs.
- Operating voltage 220 – 240 V
- Non – dimmable.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Public indoor



Shopping Center



Commercial



Workplace



Educational center



TECHNICAL OPERATING & ELECTRICAL DATA


Input Voltage & Frequency	AC220-240V, 50/60Hz
Rated CRI	90
Beam Angle	70°
Life Span	30.000h
Ingress Protection Rating	IP20
Dimming	Non-Dimmable
Ambient Temperature	-20~+45°C
Switching Cycle ON/OFF	100,000

SPECIFICATIONS


Code No.	Model No.	Power	CCT	Lumen	Efficacy	Current
612325	ILS5.6RCL930WW02	5.6W	3000K	420	75	29 mA
612326	ILS5.6RCL940NW02	5.6W	4000K	440	79	29 mA
612327	ILS5.6RCL950DL02	5.6W	5000K	450	80	29 mA
612328	ILS8RCL930WW01	8W	3000K	600	75	29 mA
612329	ILS8RCL940NW01	8W	4000K	630	79	29 mA
612330	ILS8RCL950DL01	8W	5000K	640	80	29 mA
612331	ILS16RCL930WW02	16W	3000K	1180	74	29 mA
612332	ILS16RCL940NW02	16W	4000K	1230	77	29 mA
612333	ILS16RCL950DL02	16W	5000K	1250	78	29 mA
612334	ILS24RCL930WW02	24W	3000K	1770	74	29 mA
612335	ILS24RCL940NW02	24W	4000K	1860	78	29 mA
612336	ILS24RCL950DL02	24W	5000K	1900	79	29 mA

DIMENSIONS


Code No.	Model No.	Dimensions
612325	ILS5.6RCL930WW02	Ø94x54mm
612326	ILS5.6RCL940NW02	Ø94x54mm
612327	ILS5.6RCL950DL02	Ø94x54mm
612328	ILS8RCL930WW01	Ø106x56mm
612329	ILS8RCL940NW01	Ø106x56mm
612330	ILS8RCL950DL01	Ø106x56mm
612331	ILS16RCL930WW02	Ø165x75mm
612332	ILS16RCL940NW02	Ø165x75mm
612333	ILS16RCL950DL02	Ø165x75mm
612334	ILS24RCL930WW02	Ø216x90mm
612335	ILS24RCL940NW02	Ø216x90mm
612336	ILS24RCL950DL02	Ø216x90mm

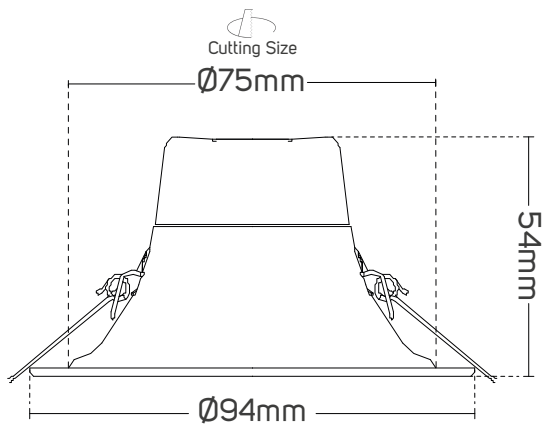


612327 - 612326 - 612325

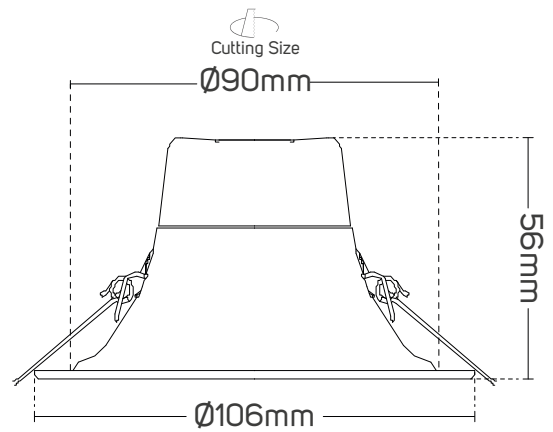

612330 - 612329 - 612328












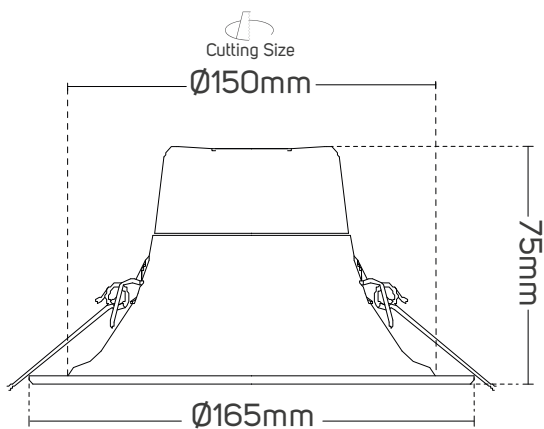


612333 - 612332 - 612331

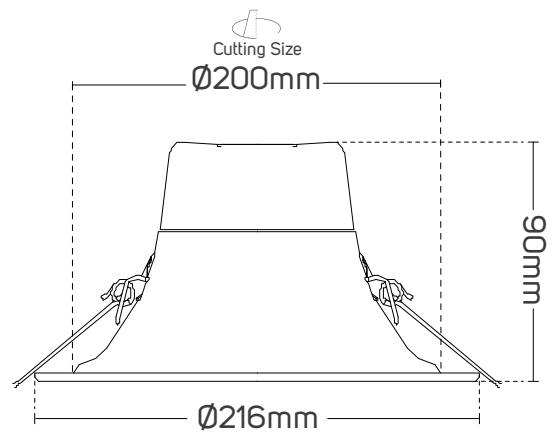

612336 - 612335 - 612334

PHOTOMETRIC DATA

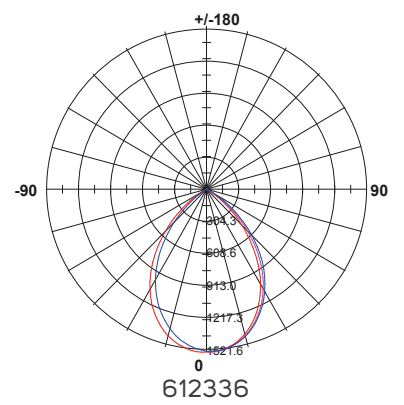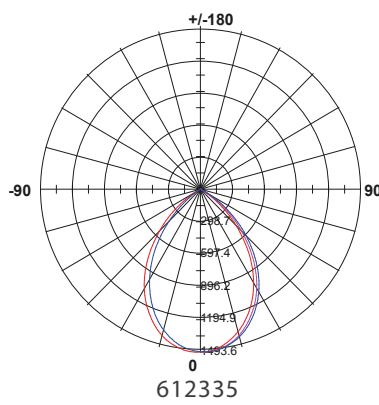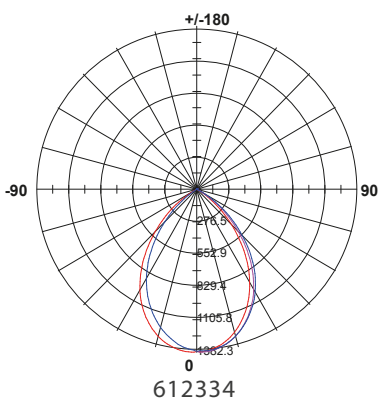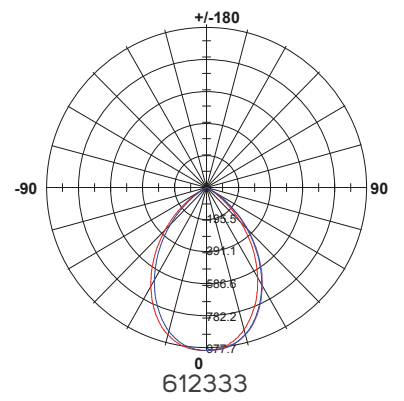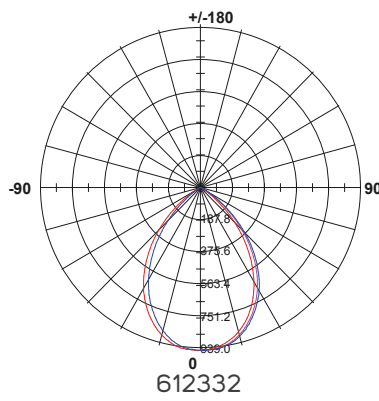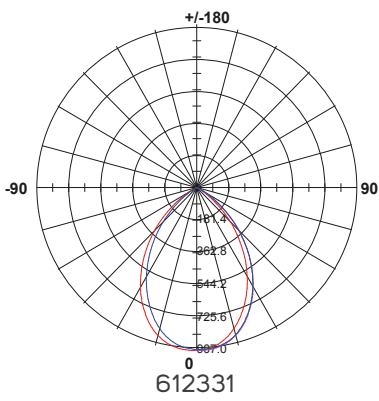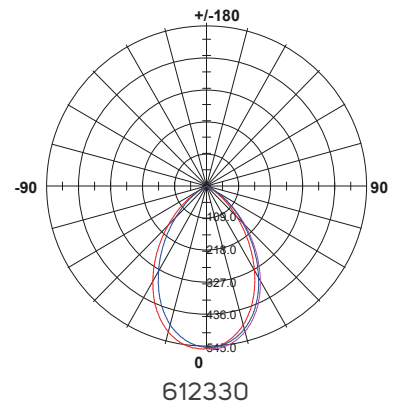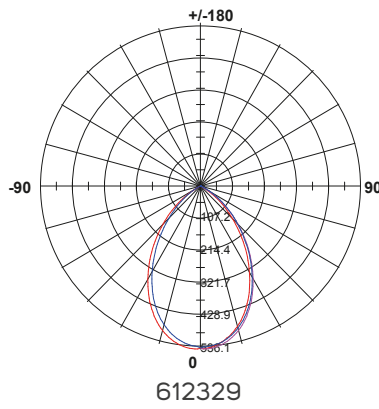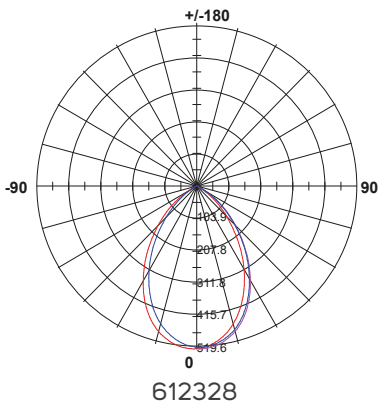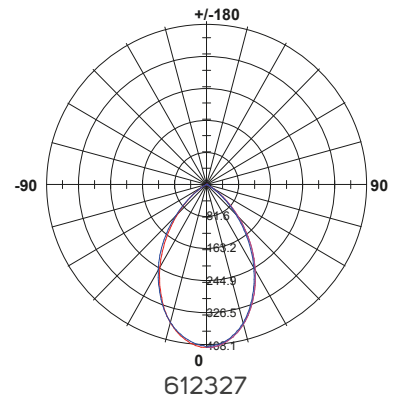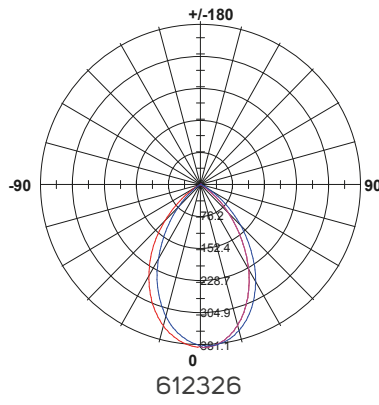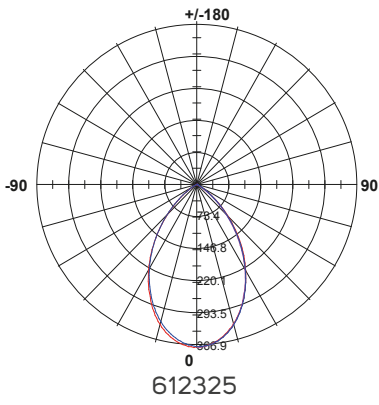

APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED RECESSED CEILING LUMINAIRE SERIES

**BEYOND LIGHT..
TO THE LAST DETAILS!**



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.

09092021M/1