



Stylish **Design**, Sharp **Edges**

## LED RECESSED CEILING LUMINAIRE SERIES

### PRODUCT INFORMATION

- Suitable for a series of lighting applications in office, retail and general area lighting.
- Available in a wide variety of lumen packs, cut out size and color temperature.
- ILLUS LED RECESSED CEILING Luminaire gives the customer the flexibility  
To choose between 12 models based on their specific need with lumen package from 420 lm to 1900 lm.

### BENEFITS

- Compact design for better integration with the building.
- Comfortable light with high efficiency
- Reliable performance for indoor applications.

### FEATURES

- High CRI > 90.
- Efficacy up to 80 lm/w.
- Long life span 30,000 hrs.
- Operating voltage 220 – 240 V
- Non – Dimmable.



**BEYOND LIGHT..  
TO THE LAST DETAILS!**

## AREAS OF APPLICATION



Hospitality



Public indoor



Shopping Center



Commercial



Workplace



Educational center



## TECHNICAL OPERATING & ELECTRICAL DATA


Input Voltage & Frequency	AC220-240V, 50/60Hz
Rated CRI	90
Beam Angle	70°
Life Span	30.000 hs
Ingress Protection Rating	IP20
Dimming	Non-Dimmable
Ambient Temperature	-20°C~+45°C
Switching Cycle ON/OFF	100,000

## SPECIFICATIONS


Code No.	Model No.	Power	CCT	Lumen	Efficacy	Current
612349	ILS5.6RCL930WW04	5.6W	3000K	420	75	29 mA
612350	ILS5.6RCL940NW04	5.6W	4000K	440	79	27 mA
612351	ILS5.6RCL950DL04	5.6W	5000K	550	80	29 mA
612352	ILS8RCL930WW02	8W	3000K	600	75	39 mA
612353	ILS8RCL940NW02	8W	4000K	630	79	40 mA
612354	ILS8RCL950DL02	8W	5000K	640	80	40 mA
612355	ILS16RCL930WW04	16W	3000K	1180	74	78 mA
612356	ILS16RCL940NW04	16W	4000K	1230	77	80 mA
612357	ILS16RCL950DL04	16W	5000K	1250	78	80 mA
612358	ILS24RCL930WW04	24W	3000K	1770	74	111 mA
612359	ILS24RCL940NW04	24W	4000K	1860	78	112 mA
612360	ILS24RCL950DL04	24W	5000K	1900	79	113 mA

## DIMENSIONS


Code No.	Model No.	Dimensions
612349	ILS5.6RCL930WW04	94x94x54mm
612350	ILS5.6RCL940NW04	94x94x54mm
612351	ILS5.6RCL950DL04	94x94x54mm
612352	ILS8RCL930WW02	106x106x56mm
612353	ILS8RCL940NW02	106x106x56mm
612354	ILS8RCL950DL02	106x106x56mm
612355	ILS16RCL930WW04	165x165x75mm
612356	ILS16RCL940NW04	165x165x75mm
612357	ILS16RCL950DL04	165x165x75mm
612358	ILS24RCL930WW04	216x216x90mm
612359	ILS24RCL940NW04	216x216x90mm
612360	ILS24RCL950DL04	216x216x90mm

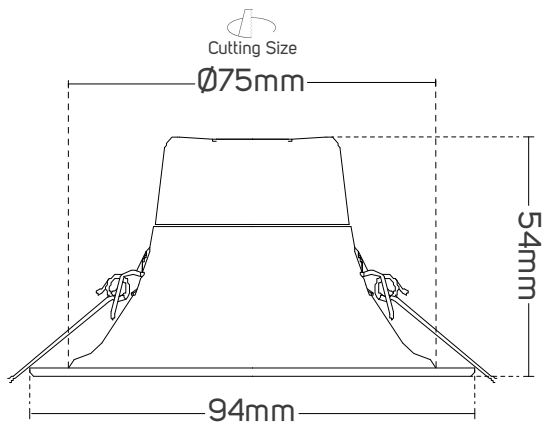


612351 - 612350 - 612349

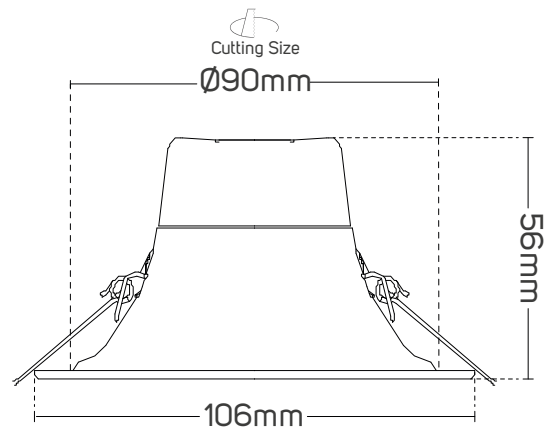

612354 - 612353 - 612352












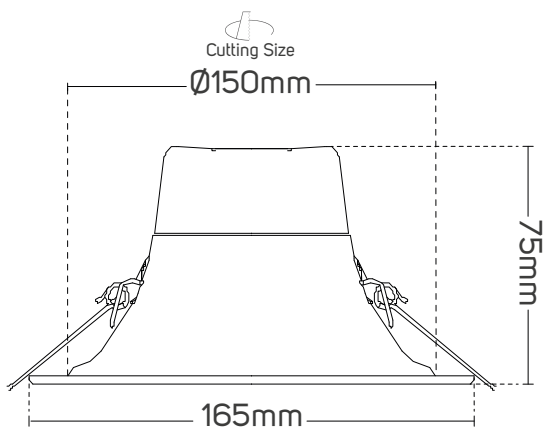


612357 - 612356 - 612355

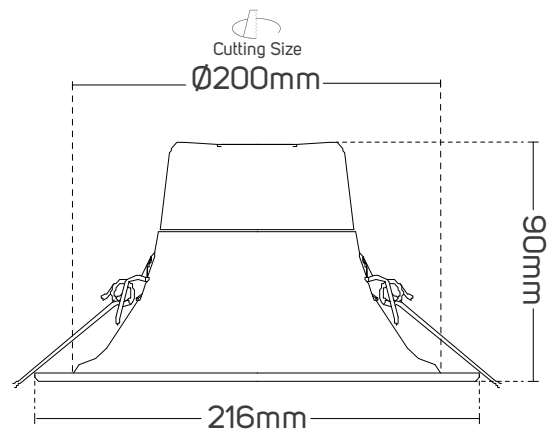

612360 - 612359 - 612358

# PHOTOMETRIC DATA

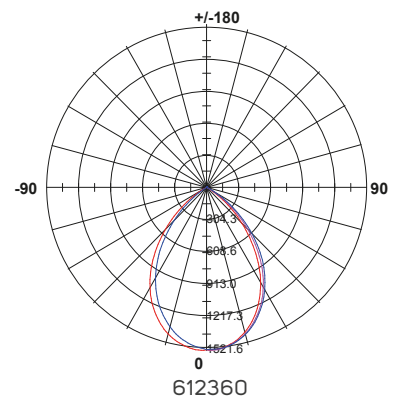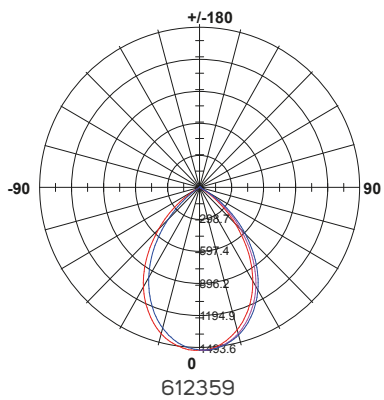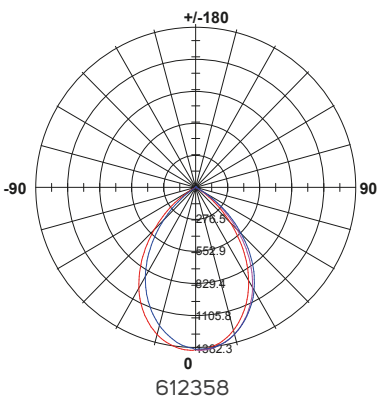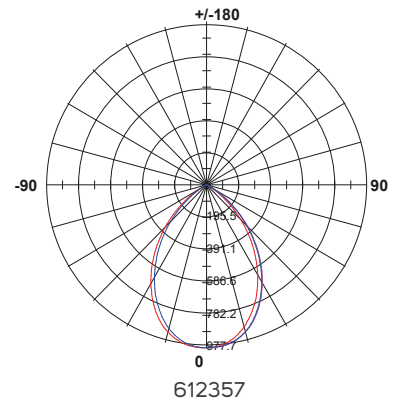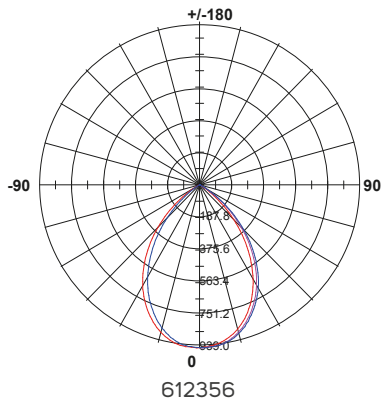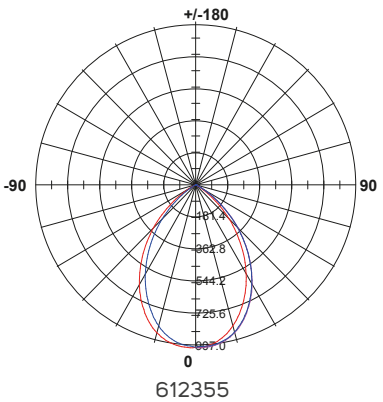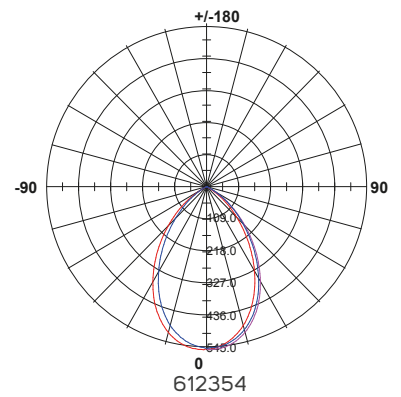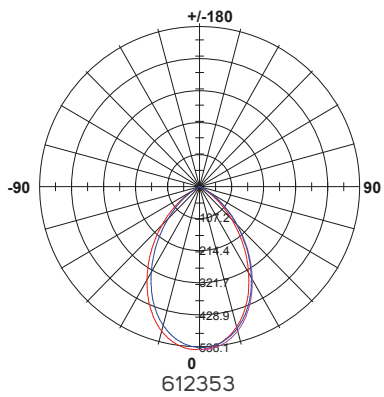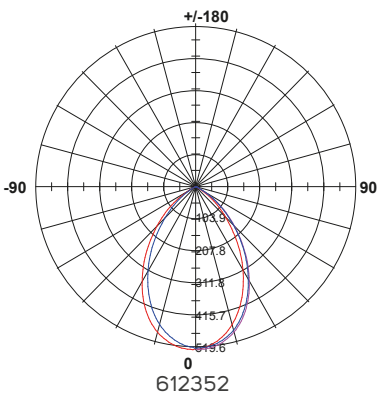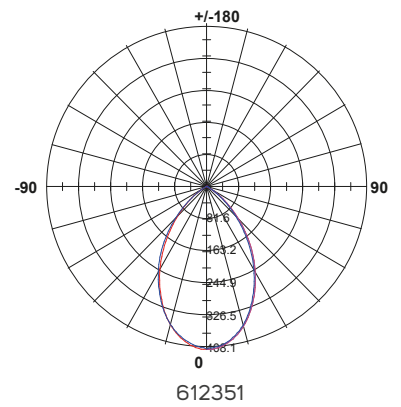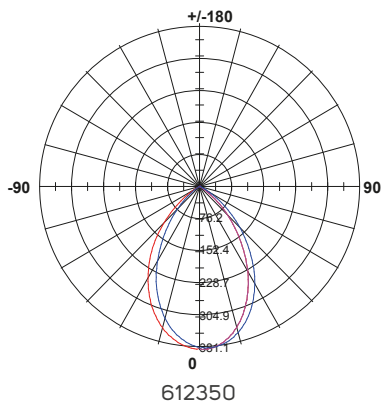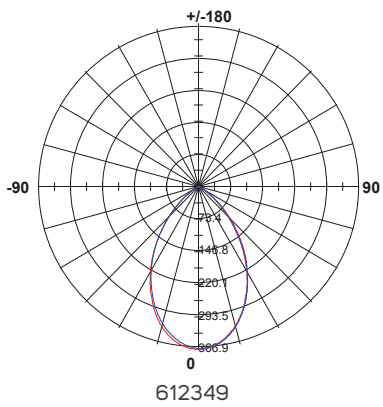

## APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

## LED RECESSED CEILING LUMINAIRE SERIES

**BEYOND LIGHT..  
TO THE LAST DETAILS!**



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

[www.illusillumination.com](http://www.illusillumination.com)

illuS illumination reserve the right to make dimensional, design and technical alternations without prior notice. illuS illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illuS do not have direct control on where and how the products are installed, illuS illumination cannot accept any liability either direct or indirect arising from the use of illuS products whether or not in accordance with any advice, specification, recommendation or information provided by illuS illumination or its distributors.

09092021V1