

# Simply Great LED

## LED SURFACE MOUNTED LUMINAIRE SERIES

#### PRODUCT INFORMATION

- Suitable for entrances, lobbies, corridors and staircases.
- Affordable, reliable and energy efficient choice.
- ILLUS LED SURFACE MOUNTED Luminaire gives the customer the flexibility to choose between 6 CCT based on their specific need with lumen package from 840 to 1370 lm.

#### **BENEFITS**

- Modern, unobtrusive design.
- Saves energy.
- Wide range of applications.

#### **FEATURES**

- High CRI>92.
- Efficacy up to 87lm/w.
- Long life span 25,000 hrs.
- Operating voltage 240 220 V.
- Non dimmable.



## **AREAS OF APPLICATION**







Public indoor

Shopping Center







Commercial

Workplace

Educational center



## I TECHNICAL OPERATING & ELECTRICAL DATA


Input Voltage & Frequency	AC220-240V, 50/60Hz
Beam Angle	120°
Rated CRI	92
Life Span	25,000h
Ingress Protection Rating	IP20
Dimming	Not Dimmable
Ambient Temperature	-20°~+45° C
Switching Cycle ON/OFF	12500

## **SPECIFICATIONS**


Code No.	Model No.	Power	CCT	Lumen	Efficicacy	Current
612109	ILS10SMCL930WW02	10W	3000K	840lm	84lm/w	85mA
612110	ILS10SMCL940NW02	10W	4000K	875lm	87lm/w	85mA
612111	ILS10SMCL950DL02	10W	5000K	875lm	87lm/w	85mA
612112	ILS16SMCL930WW02	16W	3000K	1300lm	81lm/w	125mA
612113	ILS16SMCL940NW02	16W	4000K	1370lm	85lm/w	125mA
612114	ILS16SMCL950DL02	16W	5000K	1370lm	85lm/w	125mA

#### **DIMENSIONS**

Code No.	Model No.	Dimensions
612109	ILS10SMCL930WW02	250x62mm
612110	ILS10SMCL940NW02	250x62mm
612111	ILS10SMCL950DL02	250x62mm
612112	ILS16SMCL930WW02	300x64mm
612113	ILS16SMCL940NW02	300x64mm
612114	ILS16SMCL950DL02	300x64mm




612111 - 612110 - 612109




612114 - 612113 - 612112


## | PHOTOMETRIC DATA










612110










#### **APPLICATION IMAGE**

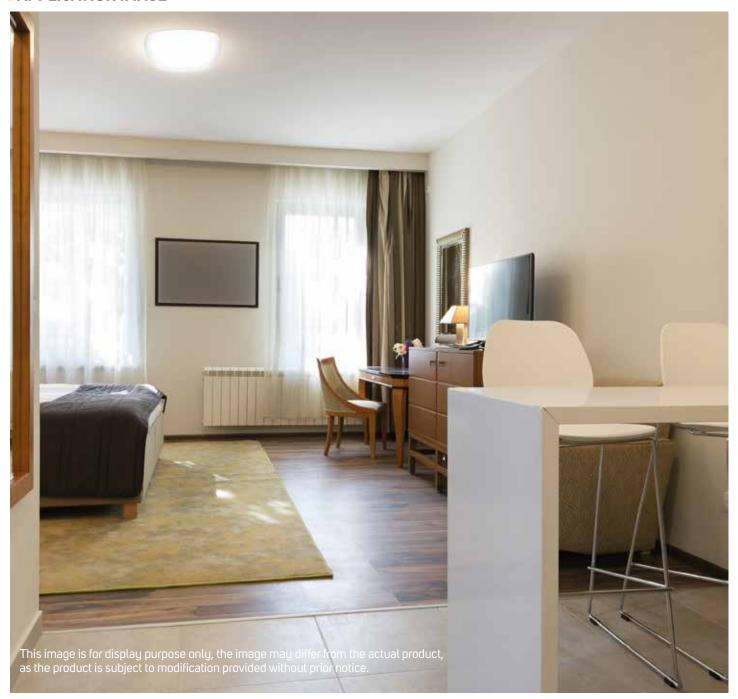

## LED SURFACE MOUNTED LUMINAIRE SERIES

BEYOND LIGHT..
TO THE LAST DETAILS!

